



D20-40/20-400-PP

30.000 - 50.000 l/h

Typical applications

- Plating
- Rinsing
- Filtration
- Waste treatment
- Scrubbing


Features

- Available in PP or NPP
- Immersion length 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

Options

- Suction extension pipe
- Out-of-Tank model
- Vapour lock
- Strainer

Vertical pumps series D20

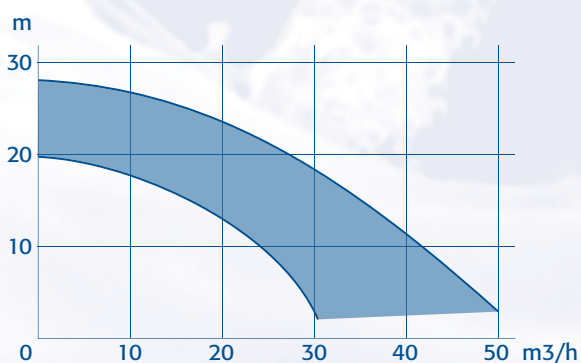


Type

D20-40/20-400-PP
D20-45/25-400-PP
D20-50/28-400-PP

Out (d/DN)

50/40

 www.hendor.com

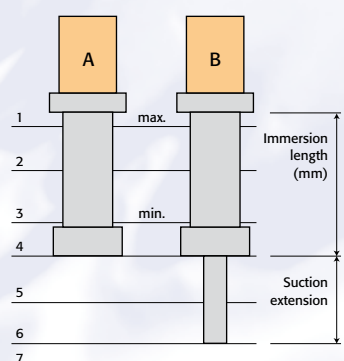

Immersion length (mm)
Suction extension

1
2
3
4
5
6
7

max.
min.

A
B

Info 2013707/RO February, 2013